## (19) World Intellectual Property Organization International Bureau



## 

(43) International Publication Date 7 September 2001 (07.09.2001)

PCT

# (10) International Publication Number WO 01/65112 A1

(51) International Patent Classification7:

\_

(21) International Application Number: PCT/GB01/01012

(22) International Filing Date: 28 February 2001 (28.02.2001)

(25) Filing Language:

English

F03B 13/24

(26) Publication Language:

English

(30) Priority Data: 0004940.3

2 March 2000 (02.03.2000) GI

(71) Applicant and

- (72) Inventor: KEMP, John, Frederick [GB/GB]; The Old Coach House. The Street. Patching, West Sussex BN13 3XF (GB).
- (74) Agent: HUGHES, Brian, P.; Brian Hughes & Co., Letter-box Cottage, Friezley Lane, Cranbrook, Kent TN17 2LL (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

#### Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR DERIVING ENERGY FROM WAVES

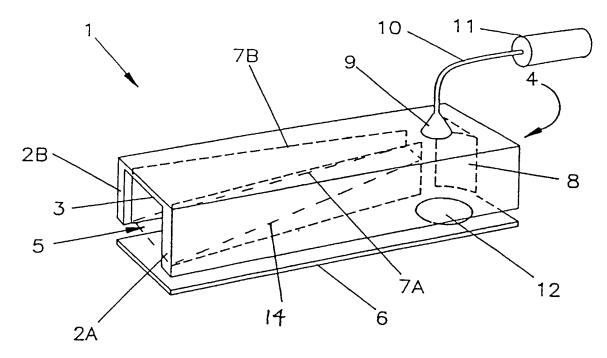

(57) Abstract: Apparatus for deriving energy from waves, the apparatus comprising a chamber (1) adapted to float in water but having a water plane area such that its vertical oscillating movement is substantially damped relative to the height of waves in the water in which it is floating, a chamber inlet port (5) at one end of the chamber adapted to face into a wavetrain, and vertical side plates (7A, 7B) delivering compressed air to a manifold and thence to an outlet port (9) and a baffle (8).

01/65112 A1

一种

10

20

# 10/030237 JC13 Rec'd PCT/PTO 25 OCT 2001

#### Title: Apparatus for deriving energy from waves

The present invention relates to an apparatus for deriving energy from waves, particularly waves in the sea.

Devices for deriving energy from sea waves are known. Many of these devices use the vertical motion of waves to drive an oscillating column of air through a self-rectifying turbine. In other cases, waves are induced to break and the water channelled upwards tp replenish continuously an elevated reservoir. Most devices are sited on the shoreline or on the sea bed, and the construction needs to be very substantial to cope with the forces produced by the waves.

The invention seeks to derive energy from waves in a different manner by using the forward motion of a wave to compress the air between two wave peaks.

According to the present invention there is provided an apparatus for deriving energy from waves comprising a chamber adapted to float in water but having a water plane area such that its vertical oscillating movement is substantially damped relative to the height of waves in the water in which it is floating, a chamber inlet port at one end of the chamber adapted to face into a wavetrain, and vertical side plates delivering compressed air to a manifold and thence to an outlet port and a baffle.

In use waves travel through the inlet port and compress air in the wave troughs as each wave advances into the manifold and then hits the baffle whereby the compressed air is forced out of the outlet port to provide a source of energy.

Preferably the chamber is an elongate chamber.

5

The chamber may be formed from a pair of side walls spaced apart by a top plate.

One end of the side walls may be joined by an end wall and the other end of the side walls are spaced to provide the inlet port.

10

A bottom plate may span the side walls and the side walls may provide at least part of the buoyancy for the chamber.

The baffle may be provided adjacent the end wall, or the baffle may be provided by the end wall itself.

The baffle may taper towards the inlet port.

The chamber may include a pair of tapering side plates adjacent each side wall to compress the air entering in successive wave troughs.

The angle of taper of the side plates may be adjustable and they may be curved.

An internal ramp may be provided to form a base for the wave channel.

25

Preferably the compressed air outlet port is adjacent the baffle and the outlet may be mounted in the upper section of the compression manifold..

A wave water outlet may be provided in the chamber and may be adjacent the 5 baffle.

Means may be provided to adjust the buoyancy of the chamber to adjust its height in the water to suit different wave conditions.

An embodiment of the present invention will now be described, by way of example, with reference to the accompanying drawings in which:

Figure 1 shows a perspective view,

20

Figure 2A shows a diagrammatic cross section view of waves in the chamber prior to air being compressed, and

Figure 2B shows a diagrammatic cross section view of waves in the chamber with air compressed.

Referring to Figure 1 there is shown an apparatus for deriving energy from waves. The apparatus has an elongate chamber 1 adapted to float in water. Chamber 1 is formed from a pair of side walls 2A, 2B spaced apart by a top plate 3. One end of the side walls are joined by an end wall 4 and the other end of side walls are spaced to provide an inlet port 5. A bottom plate 6 may span the edges of the side walls opposite the top plate 3.

Chamber 1 includes a pair of internal tapering side plates 7A, 7B (shown in dotted lines) adjacent each side wall 2A, 2B to compress laterally the air in a wave trough and deliver the compressed air to a manifold 15. The bottom of the channel may be the plate 6 or an inclined ramp 14.

-4-

A baffle 8 has the double function of restricting egress of air from the compression manifold 15 and dispersing remnant wave energy so that it is not reflected back along the chamber to interfere with the next incoming wave. The tapered sides of the baffle may be curved as shown.

An air outlet port 9 is mounted on the top plate 3 to which is attached an airflow pipe 10 connected to a prime mover 11. Outlet port 9 is in the compression manifold 15 adjacent the baffle, and between the baffle and the inlet port. Wave water outlets 12 are provided in the side walls 2A, 2B adjacent the baffle 8.

Referring now to Figures 2A, 2B it will be seen that the chamber 1 may be anchored to the sea bed by anchor and chain 13. The chamber is tethered from the inlet port so that the inlet port always faces the wavetrain.

15

20

25

Buoyancy for the chamber 1 is provided mostly by the side walls 2A, 2B, but also by the end wall 4. The side and end walls have a small water plane area such that the vertical oscillating movement of chamber 1 is substantially damped relative to the height of waves in the water in which it is floating,

In use waves travel through the inlet port and travel along the wave channel created by the side plates 7A, 7B towards the compression manifold 15 and the baffle 8. As seen in Figure 2A a volume of air Z (in the trough behind a peak of wave X hitting the baffle and the following peak of wave Y) is fed into the manifold 15 under the outlet port 9. As wave Y moves towards baffle 8, the volume of air Z is compressed into the

manifold by the wave Y and forced out through the outlet port 9. Each wave hitting the baffle 8 is reflected normal to the direction of the wave train to disperse the wave energy, and excess water under pressure passes through water outlet 12.

5

10

15

20

It will be appreciated that the air between any two waves entering the chamber 1 will be compressed in the manifold 15 and expelled through the aperture 9. The compressed air may be used to drive a prime mover 11 designed to generate energy. A non-return valve (not shown) may be positioned in the pipe 10 to take off air when it reaches a designated compression.

The invention may take a form different to that specifically described above. In particular the apparatus may be adjustable to suit different wave conditions. For example means may be provided to adjust the buoyancy of the chamber to adjust its height in the water to suit different wave heights, or means may be provided to adjust the angle of taper of the side plates 7A, 7B. It is thought that the taper of the side plates 7A, 7B may help to compress the air to increase the peak pressure of air driven out through the outlet port 9, and adjustment of the taper of plates 7A, 7B may serve to give compression ratios of e.g. between 2:1 to 6:1. The position of baffle 8 may be adjustable along the length of chamber 1, e.g. to suit different wavelengths. The bottom plate 6, or the ramp 14, may also be angled, and possibly adjustable like the side plates, to help compress the air.

Also the apparatus may be of a simpler construction. For example the side walls 2A, 2B may serve as a wave channel guide and the side plates 7A, 7B may not be required. The bottom plate 6 may not be required and the end wall 4 may serve as the baffle instead of there being a separate baffle.

It is envisaged that the apparatus of the invention may be produced in different sizes to suit different types of conditions, e.g. for estuary use or for ocean use. The prime mover 11 may generate electricity. Also two or more such apparatus may be interconnected to supply a single source of compressed air to a prime mover. The prime mover may be positioned on or remote from any chamber 1.

It is also envisaged that two similar apparatus may be connected back to back, possibly with a baffle unit in common, so that one delivers compressed air to a reservoir and the other extracts air to create a partial vacuum in a second reservoir. A prime mover may then be powered by the difference in pressure between the two reservoirs.

Because the chamber 1 may be anchored to the sea bed, the force on the chamber 1 is greatly reduced compared to hitherto known fixed constructions.

#### **CLAIMS**

- Apparatus for deriving energy from waves, the apparatus comprising a chamber adapted to float in water but having a water plane area such that its vertical oscillating movement is substantially damped relative to the height of waves in the water in which it is floating, a chamber inlet port at one end of the chamber adapted to face into a wavetrain, a baffle in the chamber, and vertical side plates delivering compressed air to a manifold and thence to an outlet port and a baffle.
  - 2. Apparatus as claimed in claim 1, in which, in use, waves travel through the inlet port and compress air in the wave troughs as each wave advances into the manifold and then hits the baffle whereby the compressed air is forced out of the outlet port to provide a source of energy.
  - 3. Apparatus as claimed in claim 1 or claim 2, in which the chamber is an elongate chamber.
- 4. Apparatus as claimed in any preceding claim, in which the chamber is formed from a pair of side walls spaced apart by a top plate.
  - 5. Apparatus as claimed in claim 4, in which one end of the side walls is joined by an end wall and the other end of the side walls are spaced to provide the inlet port.

25


15

6. Apparatus as claimed in claim 5, in which a bottom plate spans the side walls and the side walls provide at least part of the buoyancy for the chamber.


- 7. Apparatus as claimed in claim 5 or claim 6, in which the baffle is provided adjacent the end wall.
  - 8. Apparatus as claimed in any preceding claim, in which the baffle tapers towards the inlet port.
- 9. Apparatus as claimed in any preceding claim, in which the chamber includes a pair of tapering side plates adjacent each side wall to compress the air entering in successive wave troughs.
- 10. Apparatus as claimed in claim 9, in which the angle of taper of the side plates is adjustable.
  - 11. Apparatus as claimed in any preceding, in which an internal ramp is provided between the inlet port and the manifold.
- 20 12. Apparatus as claimed in claim 11, in which the angle of the ramp is adjustable.
  - 13. Apparatus as claimed in any preceding claim, in which the air outlet port leads off the manifold adjacent the baffle.
- 25 14. Apparatus as claimed in any preceding claim, in which a wave water outlet is provided in the chamber adjacent the baffle.

- Apparatus as claimed in any preceding claim, in which means are provided to adjust the buoyancy of the chamber to adjust its height in the water to suit different wave conditions.
  - 16. Apparatus for deriving energy from waves substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

10

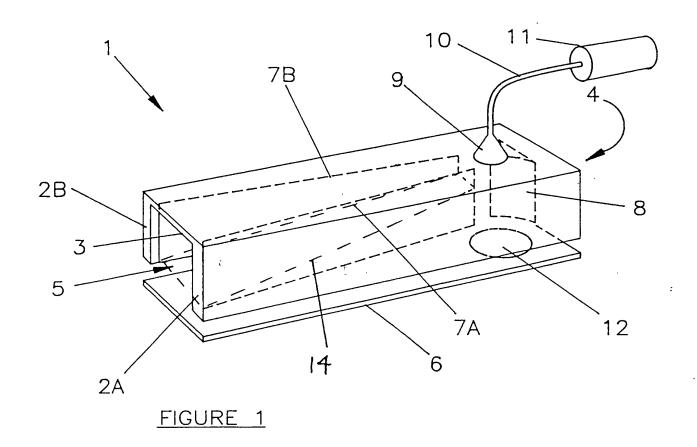

2/2

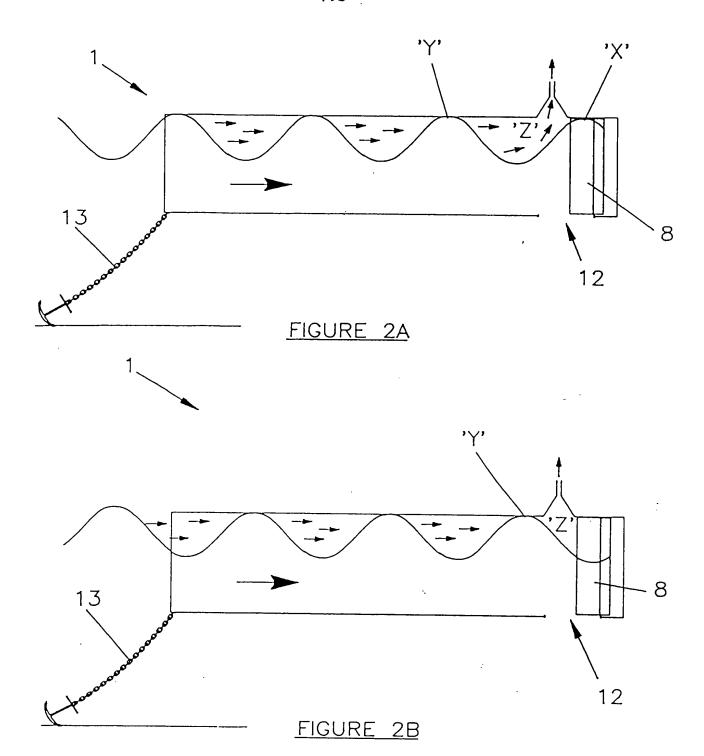



(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	(Form PCT/ISA/	of Transmittal of International Search Report 220) as well as, where applicable, item 5 below.
P1325 PCT	ACTION	
International application No.	International filing date (day/month/year)	(Earliest) Priority Date (day/month/year)
PCT/GB 01/01012	28/02/2001	02/03/2000
KEMP, John, Frederick		
according to Article 18. A copy is being tra  This International Search Report consists of		
Basis of the report		
<ul> <li>a. With regard to the language, the in</li> </ul>	nternational search was carried out on the ba ess otherwise indicated under this item.	sis of the international application in the
the international search wa Authority (Rule 23.1(b)).	as carried out on the basis of a translation of	the international application furnished to this
was carried out on the basis of the contained in the internation filed together with the inter furnished subsequently to furnished subsequently to the statement that the subsinternational application as	e sequence listing: nal application in written form. rnational application in computer readable for this Authority in written form. this Authority in computer readble form. sequently furnished written sequence listing of silled has been furnished.	
Certain claims were foun     Unity of invention is lack	nd unsearchable (See Box I). ting (see Box II).	
4. With regard to the <b>title</b> ,  X the text is approved as sub- the text has been establish	omitted by the applicant. ned by this Authority to read as follows:	
5. With regard to the <b>abstract</b> ,  the text is approved as substract the text has been establish within one month from the		ity as it appears in Box III. The applicant may, port. submit comments to this Authority.
6. The figure of the <b>drawings</b> to be public as suggested by the applicant faile	shed with the abstract is Figure No. cant.	None of the figures.



Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

	·
Apparatus for deriving energy form waves, comprison to float in water but having a water plane area oscillating movement is substantially damped res	such that its vertical lative to the height of waves in
the water in which it is floating, a chamber in chamber adapted to face into a wavetrain, and vedelivering compressed air to a manifold and hence baffle (8).	ertical side plates (7A, 7B)
•	
•	
	•
	•



A. CLASSIFICATION OF SUBJECT MATTER IPC 7 F03B13/24

According to International Patent Classification (IPC) or to both national classification and IPC

#### B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols) IPC 7 - F03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

	•
US 3 685 291 A (FADDEN WILLIAM J JR) 22 August 1972 (1972-08-22)	1-5,7-9, 13,14,16
column 4, line 11 - line 19 column 5, line 35 - line 53 figures 2-4	6,10,12,
DE 38 03 570 A (ZELCK GERD ING GRAD) 28 July 1988 (1988-07-28) column 6, line 10 - line 20 figure 2	6,15
US 4 036 563 A (TORNKVIST ROLF E A) 19 July 1977 (1977-07-19) column 3, line 65 -column 4, line 12 figure 4	10,12
	22 August 1972 (1972-08-22) column 4, line 11 - line 19 column 5, line 35 - line 53  figures 2-4  DE 38 03 570 A (ZELCK GERD ING GRAD) 28 July 1988 (1988-07-28) column 6, line 10 - line 20 figure 2  US 4 036 563 A (TORNKVIST ROLF E A) 19 July 1977 (1977-07-19) column 3, line 65 -column 4, line 12

Further documents are listed in the continuation of box C.	Patent family members are listed in annex.
<ul> <li>Special categories of cited documents:</li> <li>"A" document defining the general state of the art which is not considered to be of particular relevance</li> <li>"E" earlier document but published on or after the international filing date</li> <li>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</li> <li>"O" document referring to an oral disclosure, use, exhibition or other means</li> <li>"P" document published prior to the international filing date but later than the priority date claimed</li> </ul>	<ul> <li>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</li> <li>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</li> <li>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combined with one or more other such documents, such combination being obvious to a person skilled in the art.</li> <li>*&amp;* document member of the same patent family</li> </ul>
Date of the actual completion of the international search	Date of mailing of the international search report
23 May 2001	08/08/2001
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk	Authorized officer
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Steinhauser, U



		PC17GB 01/01012
C.(Continu	ation) DOCUMENTS CONSIDERED TO BE RELEVANT	
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 196 697 A (PASS GRAHAM ROBERT GEORGE) 5 May 1988 (1988-05-05) page 1, line 45 - line 60 page 1, line 112 -page 2, line 21	10,15
X	US 1 418 680 A (SCOTT) 6 June 1922 (1922-06-06) page 1, line 81 - line 107 page 2, line 60 - line 74 page 3, line 112 - line 119 figures 4,8	1-5,7-9, 11,13,16
X	US 1 331 209 A (GORDON PHILLIPS) 17 February 1920 (1920-02-17)	1,2,4,5, 7,9,11, 13,16
	page 1, line 23 - line 77	8
X	PATENT ABSTRACTS OF JAPAN vol. 007, no. 183 (M-235), 12 August 1983 (1983-08-12) -& JP 58 085369 A (KEIICHI FUKUYO), 21 May 1983 (1983-05-21) abstract figure 1	1-4,13, 16
Α	US 3 149 776 A (PARRISH) 22 September 1964 (1964-09-22) column 1, line 65 -column 2, line 50	1-16
A	US 4 172 689 A (THORSHEIM IVAR) 30 October 1979 (1979-10-30) column 2, line 26 - line 43 figures 2-4	3-5,9,11





Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3685291 A	22-08-1972	NONE	
DE 3803570 — A	28-07-1988	NONE	
US 4036563 A	19-07-1977	FI 31274 A FI 750052 A DE 2504330 A GB 1473428 A JP 50127034 A SE 401719 B SE 7500995 A	06-08-1975 10-07-1976 07-08-1975 11-05-1977 06-10-1975 22-05-1978 06-08-1975
GB 2196697	05-05-1988	NONE	
US 1418680 A	06-06-1922	NONE	
US 1331209 A	17-02-1920	NONE	
JP 58085369 A	21-05-1983	NONE	
US 3149776 A	22-09-1964	NONE	
US 4172689 A	30-10-1979	NONE	